


寸法図

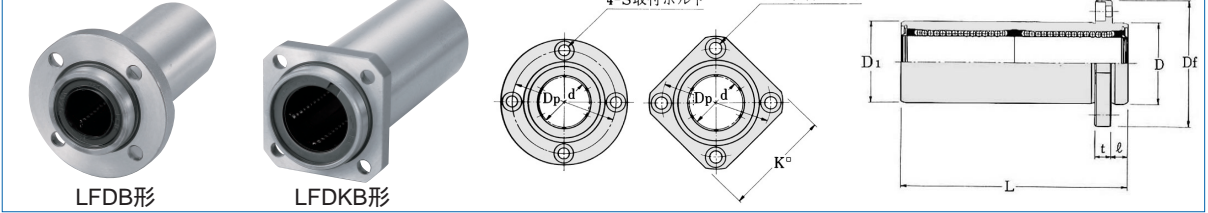


LFDB形

LFDKB形

LFDB形・LFDKB形リニアベアリング寸法および価格

型番 (標準型)	LFDB・LFDKB価格		型番 (防錆型)	MLFDB・MLFDKB		主要寸法 (mm)										基本定格荷重 (N)	
	シールなし	シール付(UU)		シールなし	シール付(UU)	d	D	D ₁	L	ℓ	Df	K	t	Dp	S	C	Co
LFDB6	3,580	3,720	MLFDB6	8,870	9,480	6	12	12	35	5	28	22	5	20	M3	354	310
LFDKB6	4,260	4,400	MLFDB6	10,380	10,900	6	12	12	35	5	28	22	5	20	M3	354	310
LFDB8	3,590	3,730	MLFDB8	8,870	9,480	8	15	15	45	5	32	25	5	24	M3	419	450
LFDKB8	4,270	4,410	MLFDB8	10,400	10,900	8	15	15	45	5	32	25	5	24	M3	419	450
LFDB10	3,710	3,850	MLFDB10	9,040	9,750	10	19	19	55	6	39	30	6	29	M4	865	850
LFDKB10	4,420	4,550	MLFDB10	10,430	10,980	10	19	19	55	6	39	30	6	29	M4	865	850
LFDB12	3,960	4,100	MLFDB12	9,750	10,380	12	21	21	57	6	42	32	6	32	M4	892	860
LFDKB12	4,710	4,860	MLFDB12	11,550	12,100	12	21	21	57	6	42	32	6	32	M4	892	860
LFDB13	4,360	4,510	MLFDB13	11,550	12,430	13	23	23	60	6	43	34	6	33	M4	902	870
LFDKB13	5,190	5,340	MLFDB13	13,530	14,300	13	23	23	60	6	43	34	6	33	M4	902	870
LFDB16	4,980	5,160	MLFDB16	12,760	13,860	16	28	28	68	6	48	37	6	38	M4	1248	1300
LFDKB16	5,920	6,110	MLFDB16	13,860	14,520	16	28	28	68	6	48	37	6	38	M4	1248	1300
LFDB20	5,980	6,200	MLFDB20	15,290	16,060	20	32	32	80	8	54	42	8	43	M5	2083	2020
LFDKB20	7,140	7,360	MLFDB20	17,820	18,700	20	32	32	80	8	54	42	8	43	M5	2083	2020
LFDB25	8,560	8,800	MLFDB25	20,900	21,670	25	40	40	112	8	62	50	8	51	M5	3517	3570
LFDKB25	10,250	10,490	MLFDB25	24,860	25,520	25	40	40	112	8	62	50	8	51	M5	3517	3570
LFDB30	12,050	12,330	MLFDB30	29,590	30,140	30	45	45	122	10	74	58	10	60	M6	5273	5010
LFDKB30	14,350	14,630	MLFDB30	34,760	35,640	30	45	45	122	10	74	58	10	60	M6	5273	5010
LFDB35	16,190	16,560	MLFDB35	38,500	39,490	35	52	52	134	10	82	64	10	67	M6	5722	6180
LFDKB35	19,410	19,780	MLFDB35	46,200	47,080	35	52	52	134	10	82	64	10	67	M6	5722	6180
LFDB40	20,980	21,340	MLFDB40	50,160	50,820	40	60	60	153	13	96	75	13	78	M8	7872	8070
LFDKB40	25,210	25,580	MLFDB40	59,730	60,940	40	60	60	153	13	96	75	13	78	M8	7872	8070

寸法図

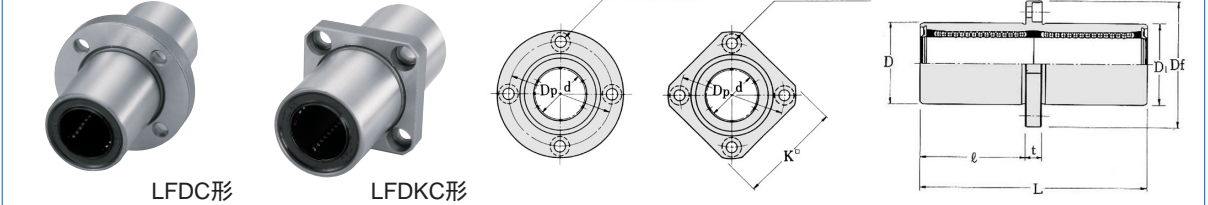

LFDC形

LFDKC形

LFDC形・LFDKC形リニアベアリング寸法および価格

型番 (標準型)	LFDC・LFDKC価格		型番 (防錆型)	MLFDC・MLFDKC		主要寸法 (mm)										基本定格荷重 (N)	
	シールなし	シール付(UU)		シールなし	シール付(UU)	d	D	D ₁	L	ℓ	Df	K	t	Dp	S	C	Co
LFDC6	3,640	3,780	MLFDC6	8,240	8,770	6	12	12	35	15	28	22	5	20	M3	354	310
LFDKC6	4,380	4,510	MLFDC6	9,880	10,410	6	12	12	35	15	28	22	5	20	M3	354	310
LFDC8	3,640	3,790	MLFDC8	8,240	8,790	8	15	15	45	20	32	25	5	24	M3	419	450
LFDKC8	4,380	4,520	MLFDC8	9,880	10,430	8	15	15	45	20	32	25	5	24	M3	419	450
LFDC10	3,780	3,920	MLFDC10	8,530	9,090	10	19	19	55	24.5	39	30	6	29	M4	865	850
LFDKC10	4,530	4,660	MLFDC10	10,220	10,780	10	19	19	55	24.5	39	30	6	29	M4	865	850
LFDC12	4,040	4,190	MLFDC12	9,110	9,690	12	21	21	57	25.5	42	32	6	32	M4	892	860
LFDKC12	4,840	4,990	MLFDC12	10,930	11,550	12	21	21	57	25.5	42	32	6	32	M4	892	860
LFDC13	4,440	4,590	MLFDC13	10,030	10,630	13	23	23	60	27	43	34	6	33	M4	902	870
LFDKC13	5,340	5,490	MLFDC13	12,100	12,650	13	23	23	60	27	43	34	6	33	M4	902	870
LFDC16	5,120	5,300	MLFDC16	11,550	12,210	16	28	28	68	31	48	37	6	38	M4	1248	1300
LFDKC16	6,140	6,320	MLFDC16	13,860	14,520	16	28	28	68	31	48	37	6	38	M4	1248	1300
LFDC20	6,210	6,430	MLFDC20	14,080	14,740	20	32	32	80	36	54	42	8	43	M5	2083	2020
LFDKC20	7,450	7,660	MLFDC20	16,830	17,600	20	32	32	80	36	54	42	8	43	M5	2083	2020
LFDC25	8,960	9,290	MLFDC25	20,240	21,010	25	40	40	112	52	62	50	8	51	M5	3517	3570
LFDKC25	10,760	11,040	MLFDC25	24,310	25,080	25	40	40	112	52	62	50	8	51	M5	3517	3570
LFDC30	12,700	12,970	MLFDC30	28,600	29,370	30	45	45	122	56	74	58	10	60	M6	5273	5010
LFDKC30	15,180	15,550	MLFDC30	34,320	35,090	30	45	45	122	56	74	58	10	60	M6	5273	5010
LFDC35	16,190	16,560	MLFDC35	36,520	37,400	35	52	52	134	62	82	64	10	67	M6	5722	6180
LFDKC35	19,410	19,780	MLFDC35	43,780	44,660	35	52	52	134	62	82	64	10	67	M6	5722	6180
LFDC40	20,980	21,340	MLFDC40	47,190	48,290	40	60	60	153	70	96	75	13	78	M8	7872	8070
LFDKC40	25,120	25,580	MLFDC40	56,650	57,640	40	60	60	153	70	96	75	13	78	M8	7872	8070

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境