


# 攪拌機

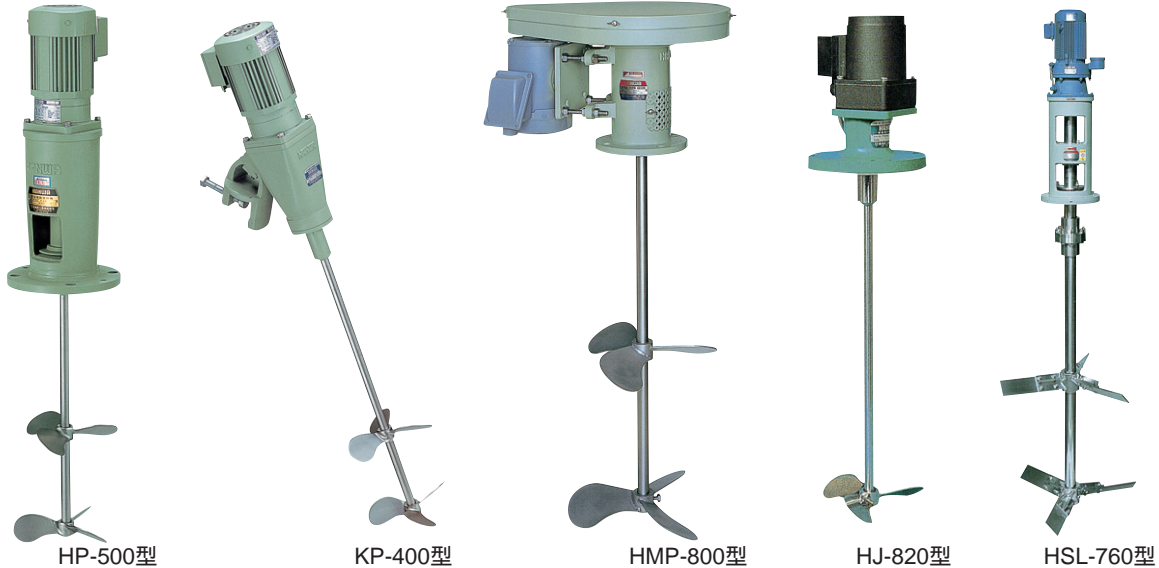

HP-500型

KP-400型

HMP-800型

HJ-820型

HSL-760型

## ハンワ攪拌機仕様

型 式	電動機		攪拌軸		プロペラ 直径 mm	取付 フランジ 寸法	最大攪拌容量 (ℓ)		重量 M付 約 kg	型 式	電動 機出力 KW	回転 数 RPM 50Hz	攪拌軸		プロペラ 直径 mm	取付 フランジ 寸法	最大攪拌容量 (ℓ)		重量 約 kg
	出力 KW	電圧 V	標準長 L mm	直径 d mm			稀薄液	中粘度					標準長 L mm	直径 d mm			稀薄液	中粘度	
HP-5001 <sup>△</sup>	0.1	100	800	16	160		600	200	17	HSL-7601-11		136		200					27
HP-5002 <sup>△</sup>	0.2	200	1000	19	200	10k	1200	400	19	HSL-7601-17		88		250					27
HP-5003	0.4	200	1200	22	250	100A	2400	800	22	HSL-7601-29		52		350					33
HP-5004	0.75	200	1500	28	300		5000	1500	32	HSL-7601-35	0.1	43	1200	400	100A	700	300		33
HP-5005	1.5	200	1650	32	350	10k	10000	3000	85	HSL-7601-43		35		450					39
HP-5006	2.2	200	1800	40	400	150A	15000	5000	100	HSL-7601-59		25		500					39
HP-5007	3.7	200	2000	45	450	200A	20000	8000	142	HSL-7602-11		136		300					37
KP-4040 <sup>△</sup>	40W	100	600	16	120	-	100	50	9	HSL-7602-17		88		350					37
KP-4060 <sup>△</sup>	60W	200	600	16	120	-	250	100	9	HSL-7602-29		52		450					37
KP-4090 <sup>△</sup>	90W	200	800	16	160	-	500	150	9	HSL-7602-35	0.2	43	1200	500	100A	1300	600		40
KP-4001 <sup>△</sup>	0.1	100	800	16	160	-	600	200	17	HSL-7602-43		35		600					41
KP-4002 <sup>△</sup>	0.2	200	1000	19	200	-	1200	400	17	HSL-7602-59		25		650					56
KP-4003	0.4	200	1200	22	250	-	2400	800	21	HSL-7603-11		136		350					38
KP-4004	0.75	200	1350	28	300	-	5000	1500	30	HSL-7603-17		88		400					38
KP-4005	1.5	200	1500	28	350	-	10000	3000	55	HSL-7603-29	0.4	52	1500	600	100A	2500	1200		49
KP-4006	2.2	200	1600	32	400	-	15000	5000	65	HSL-7603-35		43		700					60
HMP-8001	0.1	200	800	16	160		600	200	41	HSL-7603-43		35		800					62
HMP-8002	0.2	200	1000	19	200	10k	1000	400	43	HSL-7603-59		25		900					66
HMP-8003	0.4	200	1200	22	250	100A	2000	800	47	HSL-7604-11		136		400					49
HMP-8004	0.75	200	1500	28	300		4000	1500	55	HSL-7604-17		88		500					52
HMP-8005	1.5	200	1650	32	350	10k	8000	3000	120	HSL-7604-29	0.75	52	1500	700	100A	5000	2500		66
HMP-8006	2.2	200	1800	40	400	200A	12000	5000	135	HSL-7604-35		43		800					68
HMP-8007	3.7	200	2000	45	450		20000	8000	160	HSL-7604-43		35		900					70
HMP-8008	5.5	200	2200	60	500	10k	30000	12000	300	HSL-7604-59		25	1800	1000	150A				130
HMP-8009	7.5	200	2500	70	550	300A	40000	16000	340	HSL-7605-11		136		450					110
HJ-8225-8		100V			100				3.5	HSL-7605-17		88		600					110
HJ-8225-15	25	又は	450	16	170		70	20	3.5	HSL-7605-29	1.5	52	2000	800	150A	10000	5000		120
HJ-8225-30	(W)	200V			220				4.0	HSL-7605-35		43		900					120
HJ-8225-UV					120				4.0	HSL-7605-43		35		1000					130
HJ-8240-8		100V			120				5.0	HSL-7605-59		25	2800	60	200A				360
HJ-8240-15	40	又は	600	16	220		140	40	5.0	HSL-7606-11	2.2	136	2000	500	150A				110
HJ-8240-30	(W)	200V			280				5.5	HSL-7606-17		88		650					120
HJ-8240-UV					150	5K			5.0	HSL-7606-29		52		900					190
HJ-8260-8		100V			160	65A			6.0	HSL-7606-35		43	2500	1000	200A	15000	7500		200
HJ-8260-15	60	又は	700	16	250		210	70	6.0	HSL-7606-43		35		1100					210
HJ-8260-30	(W)	200V			320				6.5	HSL-7606-59		25	2800	1350					370
HJ-8260-UV					170				6.0	HSL-7607-11		136		600					190
HJ-8290-8		100V			200				7.0	HSL-7607-17		88	2500	800					210
HJ-8290-15	90	又は	900	16	280		350	100	7.0	HSL-7607-29	3.7	52		1000	200A	25000	12000		220
HJ-8290-30	(W)	200V			360				7.5	HSL-7607-35		43		1200					360
HJ-8290-UV					190				7.0	HSL-7607-43		35	2800	1300					400

詳細につきましては、総合カタログをご要求下さい。

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境