


単動シリンダ

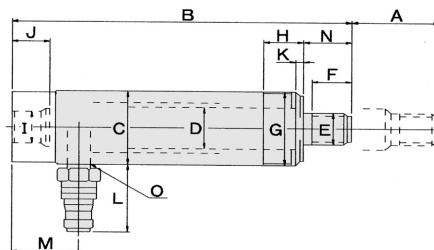

単動シリンダスプリング戻し型 (MS、Sタイプ) 仕様、価格

型式	価格	出力 kN	シリンダ 内径 cm	受圧 面積 cm ²	スト ローク A	最小 全長 B	外径 C	ピストン				カラーねじ		ねじ にがし 長 K	カップラ		ピストン 突出長 N	接続 口径 O	付属 カップラ	必要 油量 cm ³																	
								径 D	ねじ径 E	ねじ 長 F	径 G	長 H	径 I		深さ J	突出長 L					位置 M																
MS05-50	35,700	50	30.2	7.16	50	154	46	26	M20×1.5	25	M45×1.5	23	M20×1.5	24	3	48	20	31			36																
MS05-75	37,500				75	211										54																					
MS05-100	39,400				100	236										72																					
MS05-125	41,500				125	261										90																					
MS05-150	46,900				150	286										108																					
MS1-50	40,800	100	43.0	14.52	50	188	58	38	M28×2	32	M58×2	25	M28×2	31	42	20	38			73																	
MS1-75	42,800				75	240										109																					
MS1-100	45,700				100	265										146																					
MS1-125	48,000				125	290										182																					
MS1-150	49,800				150	315										218																					
MS1-200	55,900				200	365										291																					
MS1-250	62,800				250	415										363																					
MS1-300	70,800				300	465										436																					
MS2-75	60,100				200	60.5										28.74					75	269	82	53	M40×2	40	M82×2	50	M40×2	39	6	48	61	46	Rc3/8	216	
MS2-100	63,600																				100	294															288
MS2-125	69,500	125	319	360																																	
MS2-150	71,400	150	372	432																																	
MS2-200	83,800	200	410	575																																	
MS2-250	96,700	250	460	719																																	
MS2-300	110,000	300	510	863																																	
MS2-500	142,000	500	710	1437																																	
S3-50	95,300	300	75.0	44.17			50	226	102	66	M65×2	30	M100×2	59	M65×2		30	53	50	35																	221
S3-125	108,000						125	300											553																		
S3-200	123,000				200	376	884																														
S4-125	122,000	400	85.77	57.77	125	299	117	75	M70×2	33	M115×2	60	M70×2		52	35				723																	
S5-25	73,900	500	95.5	71.63	25	100	128	88.5	M92×2.5	26	M127×2.5	55		6	72	35	35	27			180																
S5-50	80,900				50	176									359																						
S5-53	108,000				53	207									380																						
S5-100	121,000				100	254									717																						
S5-153	129,000				153	307									1096																						
S7-25	110,000	700	114.35	102.69	25	130	150	78						6	72	43	35	21			257																
S7-50	122,000				50	200									514																						
S7-100	141,000				100	278									1027																						

インチねじ単動シリンダ、スプリング戻し型 (Sタイプ40、100、200kN) シリンダは、お問い合わせ下さい。
 特殊仕様のシリンダも製作します。ご連絡下さい。
 シリンダ作動時の最高出力は、シリンダ仕様の70～80%でご使用下さい。
 単動シリンダ、スプリング戻し型 (MC、MS、Sタイプ) シリンダの「戻り」スプリングには、ピストンを戻す力しかありません。また、戻る時間もホースの長さなどにより一定ではありません。

1 空圧・油圧・真空
直動システム・関連
ロボット・FA
制御・検出・計測
駆動・回転
軸受・素材・機械
動力伝達・伝動
搬送・運搬
ポンプ・送風機・粉体
工場設備・環境