


プラスチックベアリング

トックベアリング(株)


210642

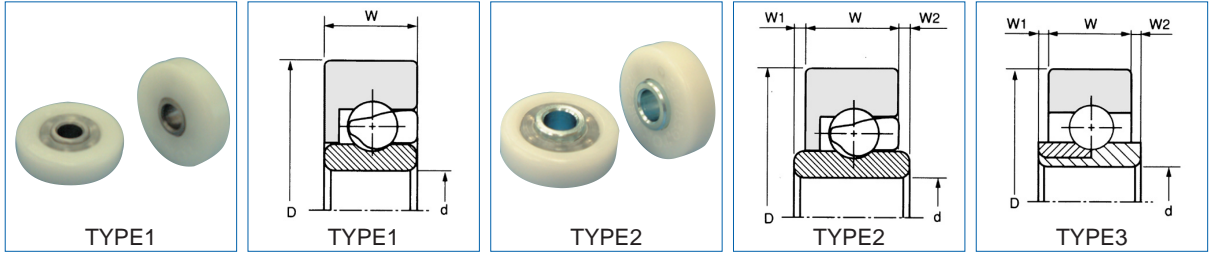

DR-Hシリーズ(外周フラット形・内輪穴)寸法・価格

許容荷重は毎分300回転時の値です。 単位: mm

呼び番号	価格	D _{0.01}	d ^{+0.1}	W _{0.2}	W1	W2	荷重 N	形状	呼び番号	価格	D _{0.01}	d ^{+0.1}	W _{0.2}	W1	W2	荷重 N	形状
DR-18-H6	190	18	6	6			49	1	DR-38-H10	535	38	10	8 ^{+0.2}			196	1
DR-18-H8	190	18	8	5			49	1	DR-40-H6	270	40 _{0.2}	6	8			196	1
DR-19-H5	135	19	5	6			49	1	DR-40-H17	710	40	17	12 ^{+0.2}			294	1
DR-19-H6	190	19	6	6			49	1	DR-47-H20	790	47	20	14			343	1
DR-20-H8	190	20	8	6 ^{+0.1}			29.4	1	DR-16-H4.1W0.25	215	16	4.1	4	0.25	0.25	19.6	2
DR-22-H6	105	22	6	7			196	1	DR-19-H4W(1.3)3	375	19	4	6	1.3	3	49	2
DR-22-H8	160	22	8	7			49	1	DR-19-H5W(0)2.3	320	19	5	6	0	2.3	49	2
DR-24-H6	110	24	6	7			196	1	DR-22-H4W(0.5)3	240	22	4	7	0.5	3	196	2
DR-24-H10.5	160	24	10.5	7			49	1	DR-22-H6W1	150	22	6	7	1	1	196	2
DR-26-H6	120	26	6	7			196	1	DR-24-H6W1	270	24	6	7	1	1	196	2
DR-26-H10	535	26	10	8			196	1	DR-26-H4W(0.5)3	240	26	4	7	0.5	3	196	2
DR-28-H6	215	28	6	7			196	1	DR-26-H6W1	160	26	6	7	1	1	196	2
DR-30-H6	180	30	6	7			196	1	DR-28-H6W1	220	28	6	7	1	1	196	2
DR-30-H10-9	445	30	10	9			245	1	DR-30-H6W1	230	30	6	7	1	1	196	2
DR-30-H10-8	180	30	10	8 ^{+0.1}			245	1	DR-35-H6W1	265	35	6	7	1	1	196	2
DR-32-H12	295	32	12	10			294	1	DR-40-H6W0.5	220	40 _{0.2}	6	8	0.5	0.5	196	2
DR-35-H6	265	35	6	7			196	1	DR-47-H8W(0)9	775	47	8	14	0	9	196	2
DR-35-H15	605	35	15	11 ^{+0.2}			294	1	DRS-16-H4.1W0.25	190	16	4.1	3.5 ^{+0.2}	0.25	0.25	49	3

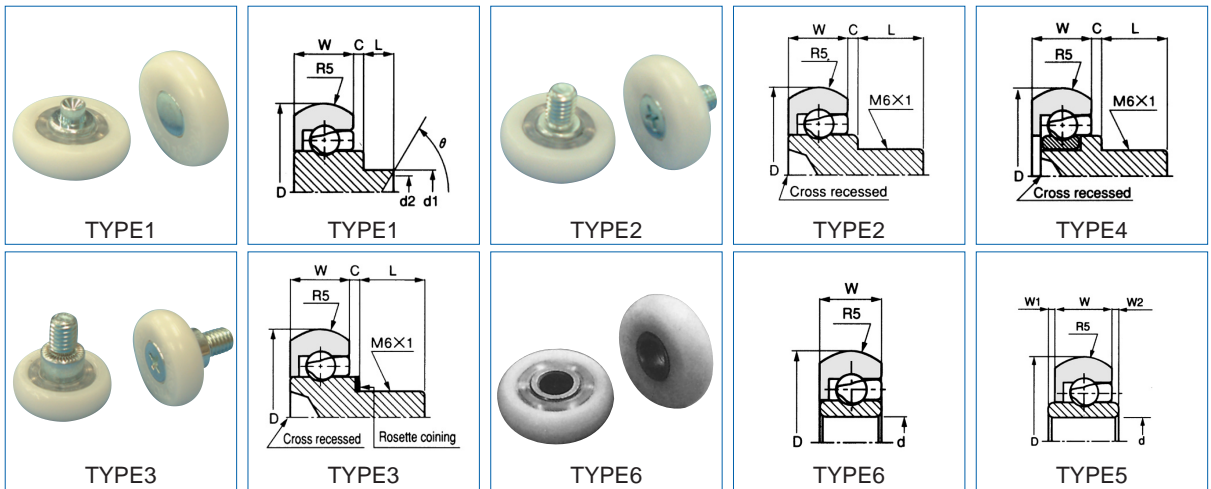

DOシリーズ(外周凸R形)寸法・価格

許容荷重は毎分300回転時の値です。 単位: mm

呼び番号	価格	D _{0.02}	d1 _{0.01}	W _{0.2}	C _{±0.4}	L _{±0.2}	W1	W2	荷重 N	形状	呼び番号	価格	D _{0.02}	d1 _{0.01}	W _{0.2}	C _{±0.4}	L _{±0.2}	W1	W2	荷重 N	形状		
DO-19-A0.5	135	19	5	6	0.5	3.5			29.4	1	DO-24-B4	230	24	7	4	8 ^{+0.5}					196	3	
DO-22-A1	135	22	5	7	1	3.5			78.4	1	DO-30-B3	270	30	7	3	8 ^{+0.5}						196	3
DO-22-A3	150	22	5	7	3	3.5			78.4	1	DO-24-BH0.5	270	24	7	0.5	8 ^{+0.5}						196	4
DO-24-A1	135	24	5	7	1	3.5			78.4	1	DO-26-BH2-11	320	26	7	2	11 ^{+0.5}						196	4
DO-26-A1	135	26	5	7	1	3.5			78.4	1	DO-24-H6W1	135	24	7							1	196	5
DO-19-B0.5	135	19		6	0.5	8 ^{+0.5}			49	2	DO-26-H6W1	160	26	7							1	196	5
DO-19-B0.5-4.5	215	19		6	0.5	4.5 ^{+0.5}			49	2	DO-35-H6W1	320	35	7							1	196	5
DO-22-B0.5	135	22		7	0.5	8 ^{+0.5}			196	2	DO-40-H6W0.5	405	40	8	0.3						0.5	196	5
DO-22-B3-10.5	215	22		7	3	10.5 ^{+0.5}			196	2	DO-19-H5	135	19	6								49	6
DO-24-B0.5	135	24		7	0.5	8 ^{+0.5}			196	2	DO-22-H6	135	22	7								196	6
DO-26-B0.5	135	26		7	0.5	8 ^{+0.5}			196	2	DO-24-H6	110	24	7								196	6
DO-28-B0.5	270	28		7	0.5	8 ^{+0.5}			196	2	DO-26-H6	135	26	7								196	6
DO-22-B5	150	22		7	5	8 ^{+0.5}			196	3	DO-28-H6	270	28	7								196	6
DO-24-B2	160	24		7	2	8 ^{+0.5}			196	3	DO-29-H6	270	29	7								196	6
DO-24-B3	135	24		7	3	8 ^{+0.5}			196	3													