



A-2 アタッチメント




K-2 アタッチメント

## HRS形、HR形コンベヤチェンA-2、K-2標準アタッチメント寸法

チェン番号	ピッチ P (mm)	寸法 (mm)						
		A	B	C	d	F	G	T
HRS03075-S、R、F	75	30	46	30	10	55	20	3.2
HRS03100-S、R、F	100	30	46	40	10	65	20	3.2
HRS03150-S、R、F	150	30	46	60	10	85	20	3.2
HRS05075-S	75	35	52	30	10	55	22	4.7
HRS05100-S、R、F	100	35	52	40	10	65	22	4.7
HRS05150-S、R、F	150	35	52	60	10	85	22	4.7
HR7813-S	78.11	60	78.5	30	12	65	35	7.9
HR10105-S、R	101.6	40	58	40	12	70	22	4.7
HR10108-S、R、F	101.6	50	64	40	12	70	28	6.3
HR10113-S、R、F	101.6	55	76	40	15	80	35	7.9
HR15208-S、R、F	152.4	50	67	60	12	90	32	6.3
HR15215-S、R、F	152.4	60	81	60	15	100	38	7.9
HR15219-S、R	152.4	65	86	60	15	100	45	9.5
HR10011-S、R、F	100	50	64	40	12	70	28	6.3
HR15011-S、R、F	150	50	64	60	12	90	28	6.3
HR20015-S、R、F	200	60	81	80	15	120	38	7.9
HR20019-S、R、F	200	75	96	80	15	118	45	9.5
HR25015-S、R、F	250	60	81	125	15	170	38	7.9
HR25019-S、R、F	250	75	96	125	15	168	45	9.5

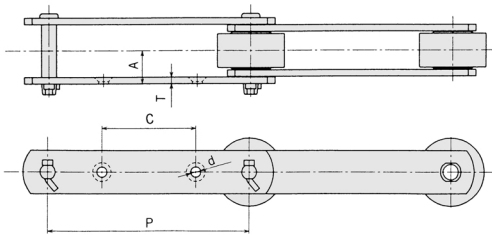

G-2 アタッチメント

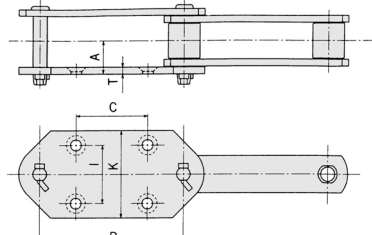

G-4 アタッチメント

## HR形コンベヤチェンG-2アタッチメント寸法

## HR形コンベヤチェンG-4アタッチメント寸法

チェン番号	ピッチ P (mm)	寸法 (mm)			
		A	d	C	T
HR10105-S、R	101.6	21.2	9.5	45	4.7
HR10108-S、R、F	101.6	26.6	12.0	35	6.3
HR15208-S、R、F	152.4	28.2	12.0	60	6.3
HR10011-S、R、F	100.0	28.4	12.0	35	6.3
HR15011-S、R、F	150.0	28.4	12.0	60	6.3
HR10113-S、R、F	101.6	32.3	12.0	35	7.9
HR15215-S、R、F	152.4	35.0	15.0	50	7.9
HR20015-S、R、F	200.0	35.0	15.0	80	7.9
HR25015-S、R、F	250.0	35.0	15.0	125	7.9
HR20019-S、R、F	200.0	45.5	15.0	70	9.5
HR25019-S、R、F	250.0	45.5	15.0	110	9.5
HR30019-S、R、F	300.0	45.5	15.0	150	9.5
HR30026-S、R、F	300.0	48.4	15.0	140	9.5
HR45026-S、R、F	410.0	48.4	15.0	220	9.5
HR45048-S、R、F	410.0	59.6	19.0	220	12.7
HR60048-S、R、F	600.0	59.6	19.0	300	12.7
HR41054-S、R、F	450.0	71.6	22.0	220	16.0
HR60054-S、R、F	600.0	71.6	22.0	300	16.0

チェン番号	ピッチ P (mm)	寸法 (mm)					
		A	C	d	l	K	T
HR15208-S、R、F	152.4	28.2	75	12	70	110	6.3
HR15011-S、R、F	150	28.4	75	12	70	110	6.3
HR15215-S、R、F	152.4	35.0	100	15	70	110	7.9
HR20015-S、R、F	200	35.0	140	15	70	110	7.9
HR25015-S、R、F	250	35.0	140	15	70	110	7.9
HR15219-S、R	152.4	38.5	75	15	80	120	9.5
HR20019-S、R、F	200	45.5	100	15	80	120	9.5
HR25019-S、R、F	250	45.5	140	15	100	150	9.5
HR20026-S	200	48.4	100	15	80	120	9.5
HR25026-S、R、F	250	48.4	140	15	100	150	9.5
HR30026-S、R、F	300	48.4	180	15	100	150	9.5
HR25048	250	59.6	140	19	100	150	12.7
HR30048-S、R、F	300	59.6	180	19	100	150	12.7

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境