



モーターローラー

(株)新井製作所

331662

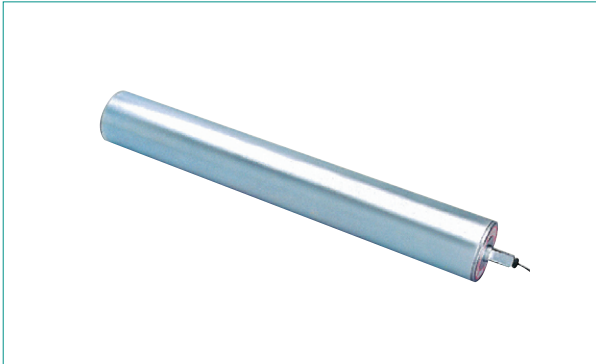

60.5モーターローラー(標準・高トルク・高出力・アキュム型)

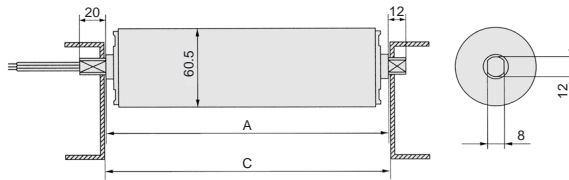

呼び寸法	200	250	300	400	500	600	700	800	900	1000
A寸法(mm)	208	258	308	408	508	608	708	808	908	1008
C寸法(mm)	210	260	310	410	510	610	710	810	910	1010

RS形(標準型) 60.5三相200V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
2RS605-5	3.8	4.5	55.60	132.82	1.68	1.40	4.02	3.41
2RS605-7	5.7	6.8	37.27	89.03	1.13	0.94	2.69	2.29
2RS605-10	8.0	9.6	55.60	132.82	1.68	1.40	4.02	3.41
2RS605-15	11.9	14.2	37.27	89.03	1.13	0.94	2.69	2.29
2RS605-20	15.4	18.4	15.42	36.84	0.47	0.39	1.11	0.95
2RS605-25	20.1	24.1	11.86	28.32	0.36	0.30	0.86	0.73
2RS605-40	32.0	38.4	15.42	36.84	0.47	0.39	1.11	0.95
2RS605-50	41.8	50.1	11.86	28.32	0.36	0.30	0.86	0.73
2RS605-80	61.7	74.0	4.28	10.23	0.13	0.11	0.31	0.26
2RS605-90	70.5	84.6	3.75	8.96	0.11	0.09	0.27	0.23

RS形(標準型) 60.5単相100V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
1RS605-5	3.8	4.5	47.6	58.1	1.44	1.27	1.76	1.72
1RS605-7	5.7	6.8	31.7	38.6	0.96	0.85	1.17	1.15
1RS605-10	8.0	9.6	38.3	48.2	1.16	0.92	1.46	1.46
1RS605-15	11.9	14.2	25.4	32.3	0.77	0.61	0.98	0.98
1RS605-20	15.4	18.4	9.2	14.2	0.28	0.24	0.43	0.43
1RS605-25	20.1	24.1	8.9	13.8	0.27	0.24	0.42	0.40
1RS605-40	32.0	38.4	9.2	11.9	0.28	0.21	0.36	0.36
1RS605-50	41.8	50.1	6.6	8.9	0.20	0.15	0.27	0.27
1RS605-80	61.7	74.0	2.9	3.3	0.09	0.07	0.10	0.10
1RS605-90	70.5	84.6	2.3	2.9	0.07	0.06	0.09	0.08

RP形(高トルク型) 60.5三相200V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
2RP605-2.4	2.0	2.4	514.0	788.0	15.55	11.19	31.10	18.66
2RP605-4.2	3.4	4.0	301.0	461.8	9.11	6.56	18.22	10.93
2RP605-5	3.8	4.5	142.8	209.2	4.32	3.45	8.64	5.47
2RP605-7	5.7	6.8	95.5	140.1	2.89	2.28	5.98	3.66
2RP605-10	8.0	9.6	128.2	197.0	3.88	2.79	7.76	4.66
2RP605-15	11.9	14.2	85.9	131.9	2.60	1.87	5.20	3.12
2RP605-20	15.4	18.4	35.7	52.2	1.08	0.86	2.16	1.36
2RP605-25	20.1	24.1	27.1	40.0	0.82	0.66	1.64	1.04
2RP605-40	32.0	38.4	32.0	49.2	0.97	0.70	1.94	1.16
2RP605-50	41.8	50.1	24.4	37.6	0.74	0.53	1.48	0.89

RP形(高トルク型) 60.5単相100V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
1RP605-2.4	2.0	2.4	215.8	227.4	6.53	6.19	6.88	6.52
1RP605-4.2	3.4	4.0	125.9	132.8	3.81	3.61	4.02	3.81
1RP605-5	3.8	4.5	56.5	70.7	1.71	1.71	2.14	2.14
1RP605-7	5.7	6.8	37.6	47.2	1.14	1.14	1.43	1.43
1RP605-10	8.0	9.6	53.8	56.8	1.63	1.54	1.72	1.63
1RP605-15	11.9	14.2	36.0	38.0	1.09	1.03	1.15	1.09
1RP605-20	15.4	18.4	15.5	19.5	0.47	0.47	0.59	0.59
1RP605-25	20.1	24.1	11.9	14.8	0.36	0.36	0.45	0.45
1RP605-40	32.0	38.4	12.8	15.5	0.39	0.38	0.47	0.45
1RP605-50	41.8	50.1	9.9	11.9	0.30	0.28	0.36	0.34

RH形(高出力型) 三相200V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
2RH605-2.4	2.0	2.4	770.9	1182.0	23.32	16.48	35.76	27.99
2RH605-4.2	3.4	4.0	451.5	692.5	13.66	9.64	20.95	16.39
2RH605-10	8.0	9.6	192.3	295.5	5.82	4.11	8.94	6.99
2RH605-15	11.9	14.2	128.9	197.6	3.90	2.76	5.98	4.68
2RH605-40	32.0	38.4	47.9	73.7	1.45	1.15	2.23	1.74
2RH605-50	41.8	50.1	36.6	56.5	1.11	0.78	1.71	1.33

RA形(アキュム型) 三相200V仕様 50/60Hz

形式	速度 (m/min)		接線力 (N)		トルク (N・m)			
	搬送		搬送	起動	搬送		起動	
	50Hz	60Hz	50Hz	50Hz	50Hz	60Hz	50Hz	60Hz
2RA605-2.4	2.0	2.4	216.5	433.0	6.55	5.24	13.10	10.48
2RA605-4.2	3.4	4.0	126.9	253.8	3.84	3.07	7.68	6.14
2RA605-5	3.8	4.5	67.4	135.2	2.04	1.63	4.09	3.27
2RA605-7	5.7	6.8	45.2	90.5	1.37	1.09	2.74	2.19
2RA605-10	8.0	9.6	53.8	108.0	1.63	1.30	3.27	2.62
2RA605-15	11.9	14.2	38.2	72.3	1.09	0.87	2.19	1.76
2RA605-20	15.4	18.4	16.8	33.7	0.51	0.40	1.02	0.81
2RA605-25	20.1	24.1	12.8	25.7	0.39	0.31	0.78	0.62
2RA605-40	32.0	38.4	13.2	26.7	0.40	0.32	0.81	0.65
2RA605-50	41.8	50.1	10.2	20.4	0.31	0.24	0.62	0.50

60.5モーターローラー価格

仕様	ローラー幅									
	200mm	300mm	400mm	500mm	600mm	700mm	800mm	900mm	1000mm	
標準型 (RS)	20,000	20,000	20,500	21,000	21,500	22,000	22,500	23,000	23,500	
高トルク型 (RP)		20,500	21,000	21,600	22,300	23,000	23,700	24,400	25,100	
高出力型 (RH)			28,500	29,000	29,700	30,400	31,100	31,800	32,500	
アキュム型 (RA)	20,000	20,000	20,500	21,000	21,500	22,000	22,500	23,000	23,500	
防滴仕様		28,500	29,000	29,500	30,000	30,500	31,000	31,500	32,000	
天然ゴム3t	26,000	26,000	29,000	30,500	34,500	36,500	40,000	43,500	45,000	
ウレタンゴム3t	29,500	29,500	32,000	34,500	37,000	40,500	43,500	47,000	50,000	
オールSUS	35,500	35,500	38,000	41,000	44,000	47,000	50,000	53,000	56,000	
防水仕様		43,500	45,500	47,500	49,500	51,500	53,500	55,500	57,500	
ブレーキ付仕様		32,000	32,500	33,000	33,800	35,000	35,500	36,000	36,500	