


# NKS クレーン用ロープ車

(株)永瀬工場

313762



寸法図

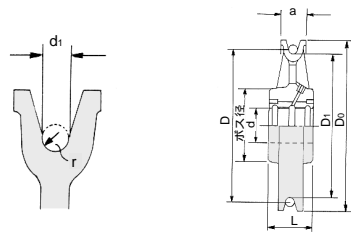

## クレーン用ロープ車寸法および価格 (砲金ブッシュ式)

単位: mm

No.	呼径	鑄鉄製 (FC25)			ダクタイル製 (FCD55)			摘要するロープ径		ロープ車のピッチ円径D	外径D <sub>o</sub>	みぞ底径D <sub>i</sub>	幅a	みぞ底半径r	軸穴径d	ボスの長さL	
		下穴品	BC式	無給油ブッシュ式	下穴品	BC式	無給油ブッシュ式	d <sub>1</sub>	JISG3525のワイヤロープの径							長さL	ボス径
06	100	4,350	13,080	12,120				4~6	6	100	116	94	20	4	25	30	50
07	125	5,120	13,850	13,650				4~6	6	125	141	117	20	4	30	35	60
08	150	6,150	15,000	15,960				6~8	8	150	167	143	22	4.5	35	35	70
09	175	8,020	16,920	20,000				6~8	8	175	195	167	24	5	40	40	80
1	200	12,120	26,540	23,460	14,620	29,810	27,120	9をこえ	10	200	226	190	31	6.3	45	50	100
2	200	12,120	26,540	27,880	14,620	29,810	27,500	10以下	10	200	226	190	31	6.3	50	50	100
3	200	12,120	26,540	25,380	14,620	29,810	29,040	10以下	10	200	226	190	31	6.3	55	40	100
4	224	16,920	30,960	38,080	18,650	34,040	41,540	10をこえ	11.2	224.2	253	213	34	7.1	50	63	115
5	224	16,920	30,960	34,420	18,650	34,040	36,920	11.2以下	11.2	224.2	253	213	34	7.1	60	50	115
6	224	16,920	30,960	37,500	18,650	34,040	41,150	11.2以下	11.2	224.2	253	213	34	7.1	65	50	115
7	250	19,620	37,120	42,880	23,270	42,880	48,270	11.2をこえ	12.5	250.5	278	238	35	7.1	55	63	115
8	250	19,620	37,120	42,880	23,270	42,880	48,080	12.5以下	12.5	250.5	278	238	35	7.1	60	63	115
9	250	19,620	37,120	42,880	23,270	42,880	48,080	12.5以下	12.5	250.5	278	238	35	7.1	70	50	125
10	280	24,620	46,150	49,040	28,650	53,460	55,190	12.5をこえ	14	280	311	266	40	8	60	80	125
11	280	24,620	46,150	54,620	28,650	53,460	60,960	14以下	14	280	311	266	40	8	65	63	125
12	280	25,770	48,080	57,500	30,770	53,850	62,500	14以下	14	280	311	266	40	8	70	63	145
13	280	25,770	48,080	56,540	30,770	53,850	61,730	14以下	14	280	311	266	40	8	75	50	145
14	320	31,150	58,650	67,880	36,730	64,620	75,960	14をこえ	16	320	354	304	45	9	70	80	135
15	320	31,150	58,650	63,460	36,730	64,620	71,730	16以下	16	320	354	304	45	9	75	80	135
16	320	32,690	59,230	69,810	38,460	68,460	78,650	16以下	16	320	354	304	45	9	80	63	160
17	320	32,690	59,230	67,120	38,460	68,460	79,810	16以下	16	320	354	304	45	9	85	63	160
18	360	40,190	71,540	83,650	46,150	81,540	93,460	16をこえ	18	360	398	342	50	10	80	100	150
19	360	40,190	71,540	79,040	46,150	81,540	88,460	18以下	18	360	398	342	50	10	85	80	150
20	360	41,150	73,270	83,270	47,880	84,040	94,040	18以下	18	360	398	342	50	10	90	80	175
21	360	41,150	73,270	88,850	47,880	84,040	99,810	18以下	18	360	398	342	50	10	95	63	175
22	400	54,420	95,580	102,310	63,650	111,540	116,150	18をこえ	20	400	443	380	56	11.2	85	100	160
23	400	54,420	95,580	107,880	63,650	111,540	122,120	20以下	20	400	443	380	56	11.2	90	100	160
24	400	56,920	98,850	100,960	106,730	114,040	115,580	20以下	20	400	443	380	56	11.2	95	80	190
25	400	56,920	98,850	122,880	106,730	114,040	137,310	20以下	20	400	443	380	56	11.2	110	80	190
26	450	72,120	123,080		86,920	144,810		20をこえ	22.4	450.4	499	428	63	12.5	95	125	180
27	450	72,120	123,080		86,920	144,810		22.4以下	22.4	450.4	499	428	63	12.5	100	100	180
28	450	79,040	130,190		92,500	152,120		22.4以下	22.4	450.4	499	428	63	12.5	110	100	215
29	450	79,040	130,190		92,500	152,120		22.4以下	22.4	450.4	499	428	63	12.5	120	80	215
30	500	98,650	158,850		116,540	186,730		22.4をこえ	25	500	555	475	71	14	120	125	200
31	500	98,650	158,850		116,540	186,730		25以下	25	500	555	475	71	14	130	125	200
32	500	103,270	169,620		122,310	199,420		25以下	25	500	555	475	71	14	140	100	240
33	500	103,270	169,620		122,310	199,420		25以下	25	500	555	475	71	14	150	100	240
34	560	135,960	215,770		162,690	260,770		25をこえ	28	560	622	532	80	16	130	160	215
35	560	135,960	215,770		162,690	260,770		28以下	28	560	622	532	80	16	140	125	215
36	560	141,150	222,120		170,770	260,620		28以下	28	560	622	532	80	16	150	125	265
37	560	141,150	222,120		170,770	260,620		28以下	28	560	622	532	80	16	160	100	265
38	630	192,690	295,770		229,810	353,850		28をこえ	30	630.5	699	599	90	18	140	160	250
39	630	192,690	295,770		229,810	353,850		31.5以下	31.5	630.5	699	599	90	18	150	160	250
40	630	194,420	298,650		232,310	358,650		31.5以下	31.5	630.5	699	599	90	18	160	125	300
41	630	194,420	298,650		232,310	358,650		31.5以下	31.5	630.5	699	599	90	18	170	125	300
42	710	219,810	352,120		262,500	416,920		31.5をこえ	33.5	710.5	787	675	100	20	160	200	280
43	710	219,810	352,120		262,500	416,920		33.5以下	33.5	710.5	787	675	100	20	170	160	280
44	710	229,620	358,650		270,380	421,730		33.5以下	35.5	710.5	787	675	100	20	180	160	330
45	710	229,620	358,650		270,380	421,730		33.5以下	35.5	710.5	787	675	100	20	190	125	330
46	800	291,350	436,150		350,580	496,730		33.5をこえ	37.5	800	886	760	112	22.4	180	200	310
47	800	291,350	436,150		350,580	496,730		40以下	40	800	886	760	112	22.4	190	200	310
48	800	291,350	436,150		350,580	496,730		40以下	40	800	886	760	112	22.4	200	160	340
49	800	291,350	436,150		350,580	496,730		40以下	40	800	886	760	112	22.4	220	160	340

寸法はJISの20型 ワイヤ径の20倍 寸法です。材質はFC25以上です。超強力型でFCD55があります。  
製品は 外径・ボス長さのみ加工、穴未加工品 全加工品の2種類あり在庫は です。軸穴加工は追加加工です。

空圧・油圧・真空

直動システム・閉鎖

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

8

ポンプ・送風機・粉体

工場設備・環境