


低騒音形

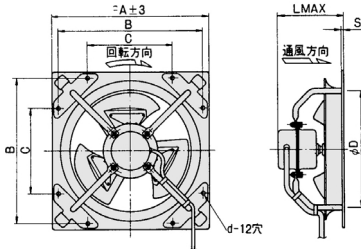

省電力形、低騒音、薄形コンパクト省スペース設計です

- 標準排気形
周囲温度：単相品 (- 20 ~ + 40)
三相品 (- 30 ~ + 50)
- 安全増防爆形
第2種場所においてeG3まで使用できます。
- 耐圧防爆形
第1種場所においてd2G4まで使用できます。
- 耐熱形：周囲温度 (+ 50 ~ + 80)

有圧換気扇標準仕様および価格

種類	型式	価格	仕様		寸法 (mm)										
			羽根車径 (cm)	公称出力 (W)	極数	相数	電圧 (V)	風量 (m³/h)	A	B	C	D	L	S	d
低騒音形	PN-204-001SH	24,700	20	15	4	1	100	720/840	320	246	120	280	167	6	7
	PN-254-002SH	26,200	25	25				1200/1380	370	298	165	330	165	6	7
	PN-304-005SH	33,800	30	50				1740/2040	420	349	210	380	173	6	7
	PN-354-01SH	45,000	35	100				2460/2880	469	434	250	—	240	6	12
	PN-404-02SH	58,200	40	200				3720/4320	520	485	280	—	250	6	12
	PN-454-04SH	73,500	45	400				5640/6600	620	540	320	560	280	7	12
	PN-504-03SH	76,300	50	300				5400/6420	655	620	355	—	250	7	12
	PN-306-002SH	37,900	30	20				1200/1440	420	349	210	380	173	6	9
	PN-356-005SH	47,900	35	50				1680/1980	469	434	250	—	245	6	12
	PN-456-02SH	66,900	45	200				4500/5280	620	540	320	560	295	7	12
	PN-204-001H	24,700	20	10				720/840	320	246	120	280	167	6	7
	PN-254-002H	26,200	25	20				1200/1380	370	298	165	330	165	6	7
	PN-304-005H	33,800	30	50				1740/2040	420	349	210	380	173	6	7
	PN-354-01H	45,000	35	100				2460/2880	469	434	250	—	210	6	12
	PN-404-01H	52,200	40	100	3120/3720	520	485	230	—	220	6	12			
	PN-404-02H	58,200	40	200	3720/4320	520	485	230	—	220	6	12			
	PN-404-04H	63,600	40	400	4920/5760	520	485	280	—	255	6	12			
	PN-454-04H	73,300	45	400	5640/6600	620	540	320	560	255	7	12			
	PN-504-04H	74,500	50	400	6240/7200	655	620	355	—	245	7	12			
	PN-504-075H	79,800	50	750	6900/8280	655	620	355	—	245	7	12			
	PN-604-15H	103,400	60	1,500	11160/13200	755	720	400	—	315	7	12			
	PN-306-002H	37,900	30	20	1200/1440	420	349	210	380	192	6	9			
	PN-406-01H	56,800	40	100	3300/3840	520	485	280	—	260	6	12			
	PN-456-02H	66,900	45	200	4500/5280	620	540	320	560	260	7	12			
	PN-506-02H	64,500	50	200	4860/5760	655	620	355	—	225	7	12			
	PN-506-04H	74,400	50	400	6180/7200	655	620	355	—	260	7	12			
	PN-606-04H	82,800	60	400	7920/9300	755	720	400	—	260	7	12			
	PN-606-075H	98,900	60	750	9420/11160	755	720	400	—	335	7	12			
PN-756-075H	149,000	75	750	14400/17340	955	900	500	—	345	7	12				
PN-756-15H	164,300	75	1,500	15180/17940	965	900	500	—	345	7	12				
PN-408-005H	54,700	40	50	2400/2820	520	485	280	—	270	6	12				
PN-508-01H	78,700	50	100	3780/4380	665	620	355	—	260	7	12				
PN-608-03H	99,600	60	300	7560/8880	755	720	400	—	360	7	12				
PN-758-075H	205,700	75	750	12660/15240	965	900	500	—	345	7	12				
PN-1008-22G2	428,000	100	2,200	26400/31200	1,250	1,180	710	—	405	6	15				
安全増防爆形	PNX-354-01G	79,700	35	100	4	6	2400/2820	469	434	250	—	310	6	12	
	PNX-404-02G	103,000	40	200			3600/4200	520	485	280	—	320	6	12	
	PNX-506-04G	121,200	50	400			6000/7080	655	620	355	—	380	7	12	
	PNX-606-075G	145,300	60	750			9120/10560	755	720	400	—	430	7	12	
	PNX-756-15G2	239,300	75	1,500			15720/18180	965	900	500	—	450	7	12	
耐圧防爆形	PNXX-204-002SH	86,100	20	20	4	1	100	420/480	276	246	162	—	310	1	7
	PNXX-254-002SH	91,400	25	20				570/690	327	298	165	—	315	2	8.5
	PNXX-304-005SH	118,000	30	50				1020/1200	378	349	210	—	325	2	8.5
	PNXX-304-007H	118,000	30	70				378	349	210	—	325	2	8.5	
	PNXX-404-02E	141,000	40	200				3600/4200	520	485	280	—	290	3	12
	PNXX-506-04E	202,400	50	400				6000/6960	660	620	355	—	360	3.2	12
PNXX-606-075E	293,700	60	750	8640/10140	760	720	400	—	395	3.2	12				
警報接点	PN-254-002SHK	42,900	25	20	4	1	100	1200/1380	370	298	165	330	165	6	9
	PN-304-005SHK	49,400	30	50				1740/2040	420	349	210	380	173	6	9
ステンレス形	PNS-254-002SH	86,800	25	20	4	1	100	1020/1200	327	298	165	—	148.5	3	7
	PNS-304-005SH	117,000	30	50				1740/2040	378	349	210	—	154.5	3	7
	PNS-304-007H	117,000	30	50				1740/2040	378	349	210	—	154.5	3	7
	PNS-404-02G	146,000	40	200				3480/4020	620	485	280	—	250	5	12
	PNS-506-04G	260,000	50	400				5820/6840	655	620	355	—	310	6.5	12
	PNS-606-075G	343,000	60	750				8700/10260	755	720	400	—	355	6.5	12