



寸法図(ストレート)

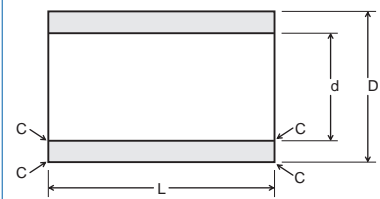

寸法図(フランジ付)

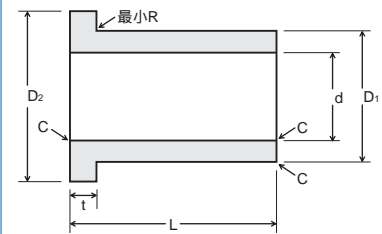

●呼び番号の構成

UKB 20 26 20 F K

呼び番号

内径 d 外径 D 全長 : L

F:フランジ付 S:ストレート 材質記号

●材質記号

型番	材質	用途	推奨温度
K	充填材入フェノール	水分・蒸気	110
F	充填材入PTFE	薬品	150
V	充填材入PPS	ドライ・水中	180
C	カーボン	高温	350
E	超高分子量ポリエチレン	水・薬品	70

## すべり軸受ストレートタイプ寸法および価格

単位: mm

型番	価格 E (ポエチン)	内径		外径		長さ		型番	価格 E (ポエチン)	内径		外径		長さ	
		d	公差	D	公差	B	公差			d	公差	D	公差	B	公差
UKB050806SE	330	5	+0.15	8	+0.1	6		UKB203025SE	1,140	20	+0.32	30	+0.13	25	
UKB050808SE	360		+0.05		0	8		UKB203030SE	1,260		+0.22		+0.03	30	
UKB060906SE	330	6	{+0.04}	9	{0}	6		UKB253125SE	1,050		+0.07	31	{0}	25	
UKB060908SE	360		{+0.01}		{-0.03}	8		UKB253520SE	950	25				20	
UKB060910SE	405					10		UKB253525SE	1,120		+0.34	35		25	
UKB081208SE	380	8	+0.17	12		8		UKB253530SE	1,240		+0.24			30	
UKB081210SE	405		+0.07			10		UKB303625SE	1,310					25	
UKB081212SE	430					12		UKB303630SE	1,450		{+0.07}	36		30	
UKB101410SE	405	10	{+0.04}	14	+0.11	10		UKB303640SE	1,790		{+0.03}		+0.15	40	
UKB101412SE	430		{+0.01}		+0.01	12		UKB304025SE	1,405				+0.05	25	
UKB101415SE	480					15		UKB304030SE	1,600			40		30	
UKB121810SE	430	12	+0.26	18	{0}	10	0	UKB304040SE	1,950		+0.40	40		40	0
UKB121812SE	450		+0.16		{-0.03}	12	-0.1	UKB323830SE	1,450		+0.30		{0}	30	-0.1
UKB121815SE	525		{+0.05}			15		UKB323840SE	1,790			38	{-0.04}	40	
UKB121820SE	595		{+0.02}			20		UKB324030SE	1,570			40		30	{0}
UKB152110SE	450	15		21		10	{-0.05}	UKB354530SE	1,670		+0.30			30	{-0.05}
UKB152112SE	500		+0.28			12		UKB354535SE	1,860			45		35	
UKB152115SE	525		+0.18			15		UKB354540SE	2,070		{+0.09}			40	
UKB152120SE	620					20		UKB405030SE	2,000		{+0.04}			30	
UKB162215SE	525	16	{+0.05}	22	+0.13	15		UKB405040SE	2,480			50		40	
UKB162220SE	620		{+0.02}		+0.03	20		UKB405050SE	2,930					50	
UKB162225SE	690					25		UKB455530SE	2,000			45		30	
UKB172315SE	525	17		23	{0}	15		UKB455540SE	2,600		+0.41	55	+0.16	40	
UKB202620SE	905		+0.32		{-0.04}	20		UKB455550SE	3,100		+0.31		+0.06	50	
UKB202625SE	1,025		+0.22			25		UKB506040SE	2,720		{+0.09}		{0}	40	
UKB202630SE	1,140	20	{+0.07}	30		30		UKB506050SE	3,260		{+0.04}	60	{-0.05}	50	
UKB203020SE	1,000		{+0.03}			20									

注) 公差はフェノール、PTFE、PPS、ポリエチレン ( ) 内公差はカーボン。注) 御見積、ご注文の際材質をご確認願います。他材質は都度御見積り致します。  
注) UKB203030SE以下は1ロット発注10ヶ単位にてお願い致します。

## すべり軸受フランジタイプ寸法および価格

単位: mm

型番	価格 E (ポエチン)	内径		外径		D2	t	全長 L	型番	価格 E (ポエチン)	内径		外径		D2	t	全長 L
		d	公差	D	公差						d	公差	D	公差			
UKB050805FE	380	5	+0.15	8	+0.1	11	1.5	5	UKB253125FE	1,570	25	+0.34	31	+0.13	37	25	
UKB050808FE	430		+0.05		0	8		8	UKB253130FE	1,760		+0.24		+0.03	30	30	
UKB060906FE	380	6	{+0.04}	9	{0}	6		6	UKB303630FE	2,000		+0.07	36	{0}	42	3	
UKB060908FE	430		{+0.01}		{-0.03}	8		8	UKB303635FE	2,260		{+0.03}			35	35	
UKB081208FE	450	8	+0.17	12	+0.11	8		8	UKB303640FE	2,500			40		40	40	
UKB081210FE	480		+0.07		+0.01	10		10	UKB324030FE	2,140					40	30	
UKB101410FE	480	10	{+0.04}	14	+0.11	10		10	UKB324035FE	2,410		+0.40	40	+0.15	48	35	
UKB101412FE	500		{+0.01}		+0.01	12		12	UKB324040FE	2,690		+0.30		+0.05	40	40	
UKB101415FE	570				{0}	15		15	UKB354330FE	2,410			43	{0}	51	30	
UKB121612FE	620	12	+0.26	16	{-0.03}	12		12	UKB354340FE	3,020		+0.09		{-0.04}	50	50	
UKB121615FE	670		+0.05			15		15	UKB354350FE	3,600					50	50	
UKB152115FE	905	15	+0.28	21		15		15	UKB404830FE	2,530		{+0.04}			30	30	
UKB152120FE	1,070		+0.18			20		20	UKB404840FE	3,220			48		40	40	
UKB162215FE	905	16	{+0.05}	22	+0.13	15		15	UKB404845FE	3,570			48		56	45	
UKB162220FE	1,070		{+0.02}		+0.03	20		20	UKB404850FE	3,910					50	50	
UKB172320FE	1,070	17		23		20		20	UKB45530FE	2,770					30	30	
UKB202620FE	1,100		+0.32			20		20	UKB455340FE	3,480		+0.41	53	+0.16	61	40	
UKB202625FE	1,260		+0.22		{0}	25		25	UKB455350FE	4,190		+0.31		+0.06	50	50	
UKB202630FE	1,410	20	{+0.07}	30	{-0.04}	30		30	UKB506040FE	3,690		{+0.09}		{0}	40	40	
UKB253115FE	1,140		+0.34			15		15	UKB506060FE	5,070		{+0.04}	60	{-0.05}	70	5	
UKB253120FE	1,380	25	{+0.07}	31		37		20							60	60	

注) 公差はフェノール、PTFE、PPS、ポリエチレン ( ) 内公差はカーボン。注) 御見積、ご注文の際材質をご確認願います。他材質は都度御見積り致します。  
注) UKB121612FE以下は1ロット発注10ヶ単位にてお願い致します。

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

6

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境