


標準セットカラー



RSB形寸法図

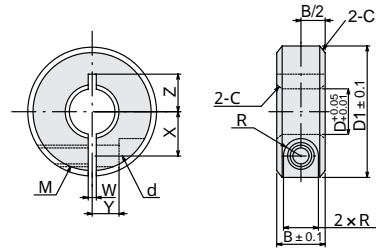

スリット形セットカラー RSB形

●材質：SS400(黒染め) 止めねじ：SCM435


単位：mm

型式	価格	軸穴径 D	総幅 B±0.1	外径 D1	W	X	Z	止めねじ M×長さ	型式	価格	軸穴径 D	総幅 B±0.1	外径 D1	W	X	Z	止めねじ M×長さ
RSB-0308	500	3	8	15	1	4.5	4.5	M3×8	RSB-1715	1,020	17	15	40	1.5	13	13	M6×20
RSB-0408	500	4	8	15	1	4.5	4.5	M3×8	RSB-1815	1,070	18	15	45	1.5	15	15	M6×20
RSB-0508	650	5	8	20	1	6	7	M3×10	RSB-2010	1,050	20	10	40	1.5	14	15	M4×16
RSB-0510	800	5	10	20	1	6	6	M4×10	RSB-2012	1,050	20	12	40	1.5	14	15	M5×16
RSB-0608	680	6	8	20	1	6	6	M3×10	RSB-2015	1,050	20	15	45	1.5	15	15	M6×20
RSB-0610	800	6	10	20	1	6	6	M4×10	RSB-2020	1,050	20	20	45	1.5	15	15	M6×20
RSB-0808	920	8	8	25	1.5	8	7	M3×10	RSB-2512	1,200	25	12	45	1.5	17	18	M5×16
RSB-0810	920	8	10	25	1.5	8	9	M4×12	RSB-2515	1,200	25	15	50	1.5	18	18	M6×25
RSB-0812	920	8	12	28	1.5	8.5	10	M5×16	RSB-3015	1,300	30	15	55	1.5	20		M6×25
RSB-0815	920	8	15	30	1.5	9	10	M6×15	RSB-3515	1,500	35	15	60	2	23		M6×25
RSB-1010	970	10	10	30	1.5	9	11	M4×12	RSB-4018	1,700	40	18	70	2	26		M8×30
RSB-1012	970	10	12	30	1.5	9	11	M5×16	RSB-4518	1,850	45	18	75	3	28		M8×30
RSB-1015	970	10	15	35	1.5	10	12.5	M6×18	RSB-5022	2,250	50	22	85	3	32		M10×35
RSB-1210	970	12	10	30	1.5	10	11	M4×12	RSB-5522	2,400	55	22	90	3	34		M10×35
RSB-1212	970	12	12	30	1.5	10	11	M5×16	RSB-6022	2,550	60	22	95	3	37		M10×35
RSB-1215	970	12	15	35	1.5	11	12.5	M6×18	RSB-6525	3,100	65	25	105	5	40		M12×40
RSB-1310	970	13	10	30	1.5	10	11	M4×12	RSB-7025	3,500	70	25	110	5	43		M12×40
RSB-1315	970	13	15	35	1.5	11	12.5	M6×18	RSB-7525	3,700	75	25	115	5	45		M12×40
RSB-1510	1,000	15	10	32	1.5	11	11	M4×12	RSB-8032	4,900	80	32	130	5	50		M16×50
RSB-1512	1,000	15	12	35	1.5	12	13	M5×16	RSB-9032	7,400	90	32	140	5	55		M16×50
RSB-1515	1,000	15	15	40	1.5	13	13	M6×20	RSB-10036	8,400	100	36	150	5	60		M16×50
RSB-1610	1,000	16	10	35	1.5	12	13	M4×12	RSB-11036	11,600	110	36	170	5	70		M16×50
RSB-1612	1,000	16	12	35	1.5	12	13	M5×16	RSB-12036	12,400	120	36	180	5	75		M16×50
RSB-1615	1,000	16	15	40	1.5	13	13	M6×20									

RSB = SCS-C, NSCS-C



RSB-MS形寸法図

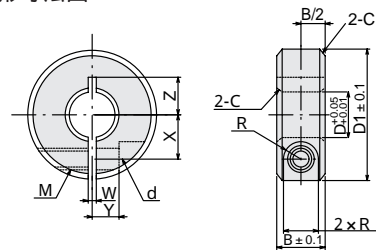

ステンレススリット形セットカラー RSB-MS形

●材質：カラー：SUS304 止めねじ：SUS304

単位：mm

型式	価格	軸穴径 D	総幅 B±0.1	外径 D1	W	X	Z	止めねじ M×長さ	型式	価格	軸穴径 D	総幅 B±0.1	外径 D1	W	X	Z	止めねじ M×長さ
RSB-0510MS	850	5	10	20	1	6	6	M4×10	RSB-1612MS	1,250	16	12	35	1.5	12	13	M5×16
RSB-0610MS	860	6	10	20	1	6	6	M4×10	RSB-1615MS	1,400	16	15	40	1.5	13	13	M6×20
RSB-0810MS	950	8	10	25	1.5	8	9	M4×12	RSB-2012MS	1,480	20	12	40	1.5	14	15	M5×16
RSB-0815MS	1,150	8	15	30	1.5	9	10	M6×15	RSB-2015MS	1,550	20	15	45	1.5	15	15	M6×20
RSB-1010MS	1,100	10	10	30	1.5	9	11	M4×12	RSB-2512MS	1,580	25	12	45	1.5	17	18	M5×16
RSB-1015MS	1,250	10	15	35	1.5	10	12.5	M6×18	RSB-2515MS	1,850	25	15	50	1.5	18	18	M6×25
RSB-1210MS	1,100	12	10	30	1.5	10	11	M4×12	RSB-3015MS	2,050	30	15	55	1.5	20		M6×25
RSB-1215MS	1,100	12	15	35	1.5	11	12.5	M6×18	RSB-3515MS	2,600	35	15	60	2	23		M6×25
RSB-1310MS	1,100	13	10	30	1.5	10	11	M4×12	RSB-4018MS	3,500	40	18	70	2	26		M8×30
RSB-1315MS	1,250	13	15	35	1.5	11	12.5	M6×18	RSB-4518MS	3,600	45	18	75	3	28		M8×30
RSB-1512MS	1,200	15	12	35	1.5	12	13	M5×16	RSB-5022MS	4,800	50	22	85	3	32		M10×35
RSB-1515MS	1,400	15	15	40	1.5	13	13	M6×20									

RSB-MS = SCS-S, NSCS-S